ITEM	COMPONENT	PART №	MATERIAL	FINISH
ASSEMBLY	→	64-10-301-90	—	—
	CUP SUB ASS'Y	—	STEEL	SEE NOTE 'A'
	PADDLE	—	STEEL	SEE NOTE 'B'
	PIN	—	STAINLESS STEEL	PASSIVATE
	SLIDE	—	STEEL	QQ-Z-325 TY I CL 2 ZINC PLATE CHROMATE DIP - BRIGHT
	SPRING	—	STAINLESS STEEL	PASSIVATE
	BRACKET		STEEL	ZINC PLATE
	NUT	—	STEEL	ZINC PLATE
	LOCKWASHER	—	STEEL	ZINC PLATE

NOTE "A" - CUP; BLACK ORGANIC COATING
GUIDE; ZINC PLATE PER QQ-Z-325 TY.I,CL.2 PLUS CHROMATE DIP - BRIGHT
STUD; ZINC PLATE PER QQ-Z-325 TY.I,CL.3 PLUS CHROMATE DIP - YELLOW

NOTE "B" - PADDLE; STEEL, BLACK ORGANIC COATING

INSTALLATION - PREPARE A RECTANGULAR HOLE 3 1/4 X 4 1/4 (1/8 MAX CORNER RADII) ADJUST FIRST NUT, AS SHOWN, FOR THICKNESS OF OUTER PANEL. PLACE LATCH IN HOLE, THEN PLACE BRACKET OVER STUD AS SHOWN AND SECURE WITH LOCKWASHER AND NUT

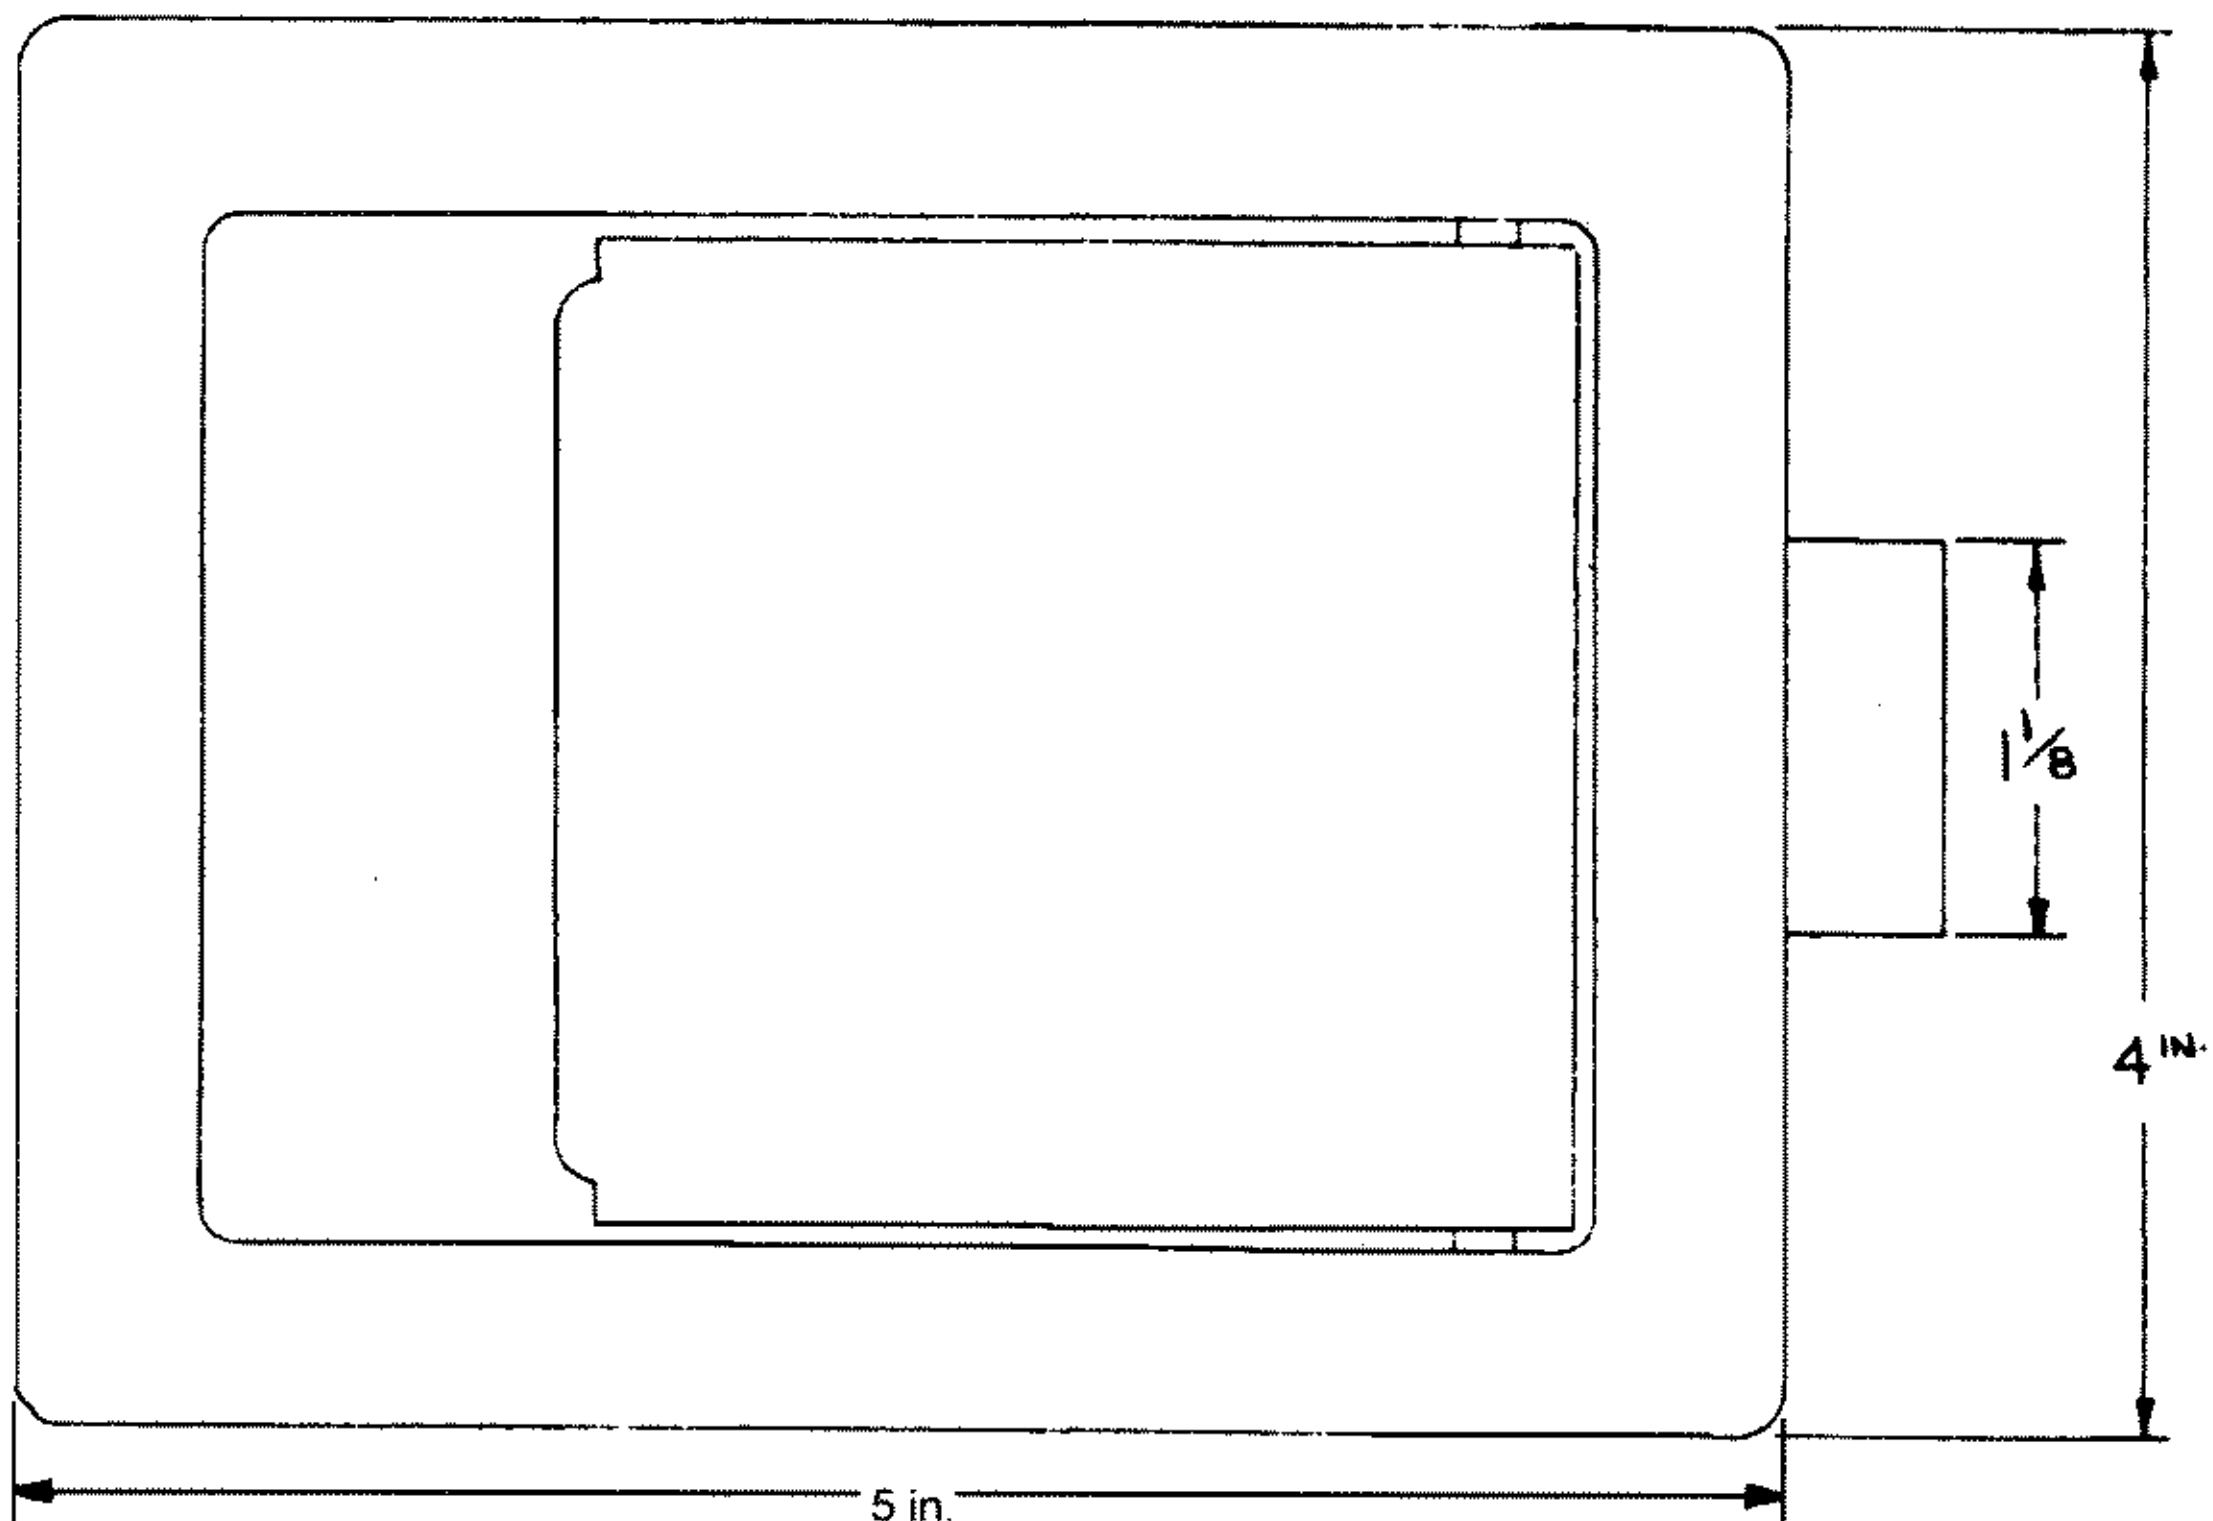

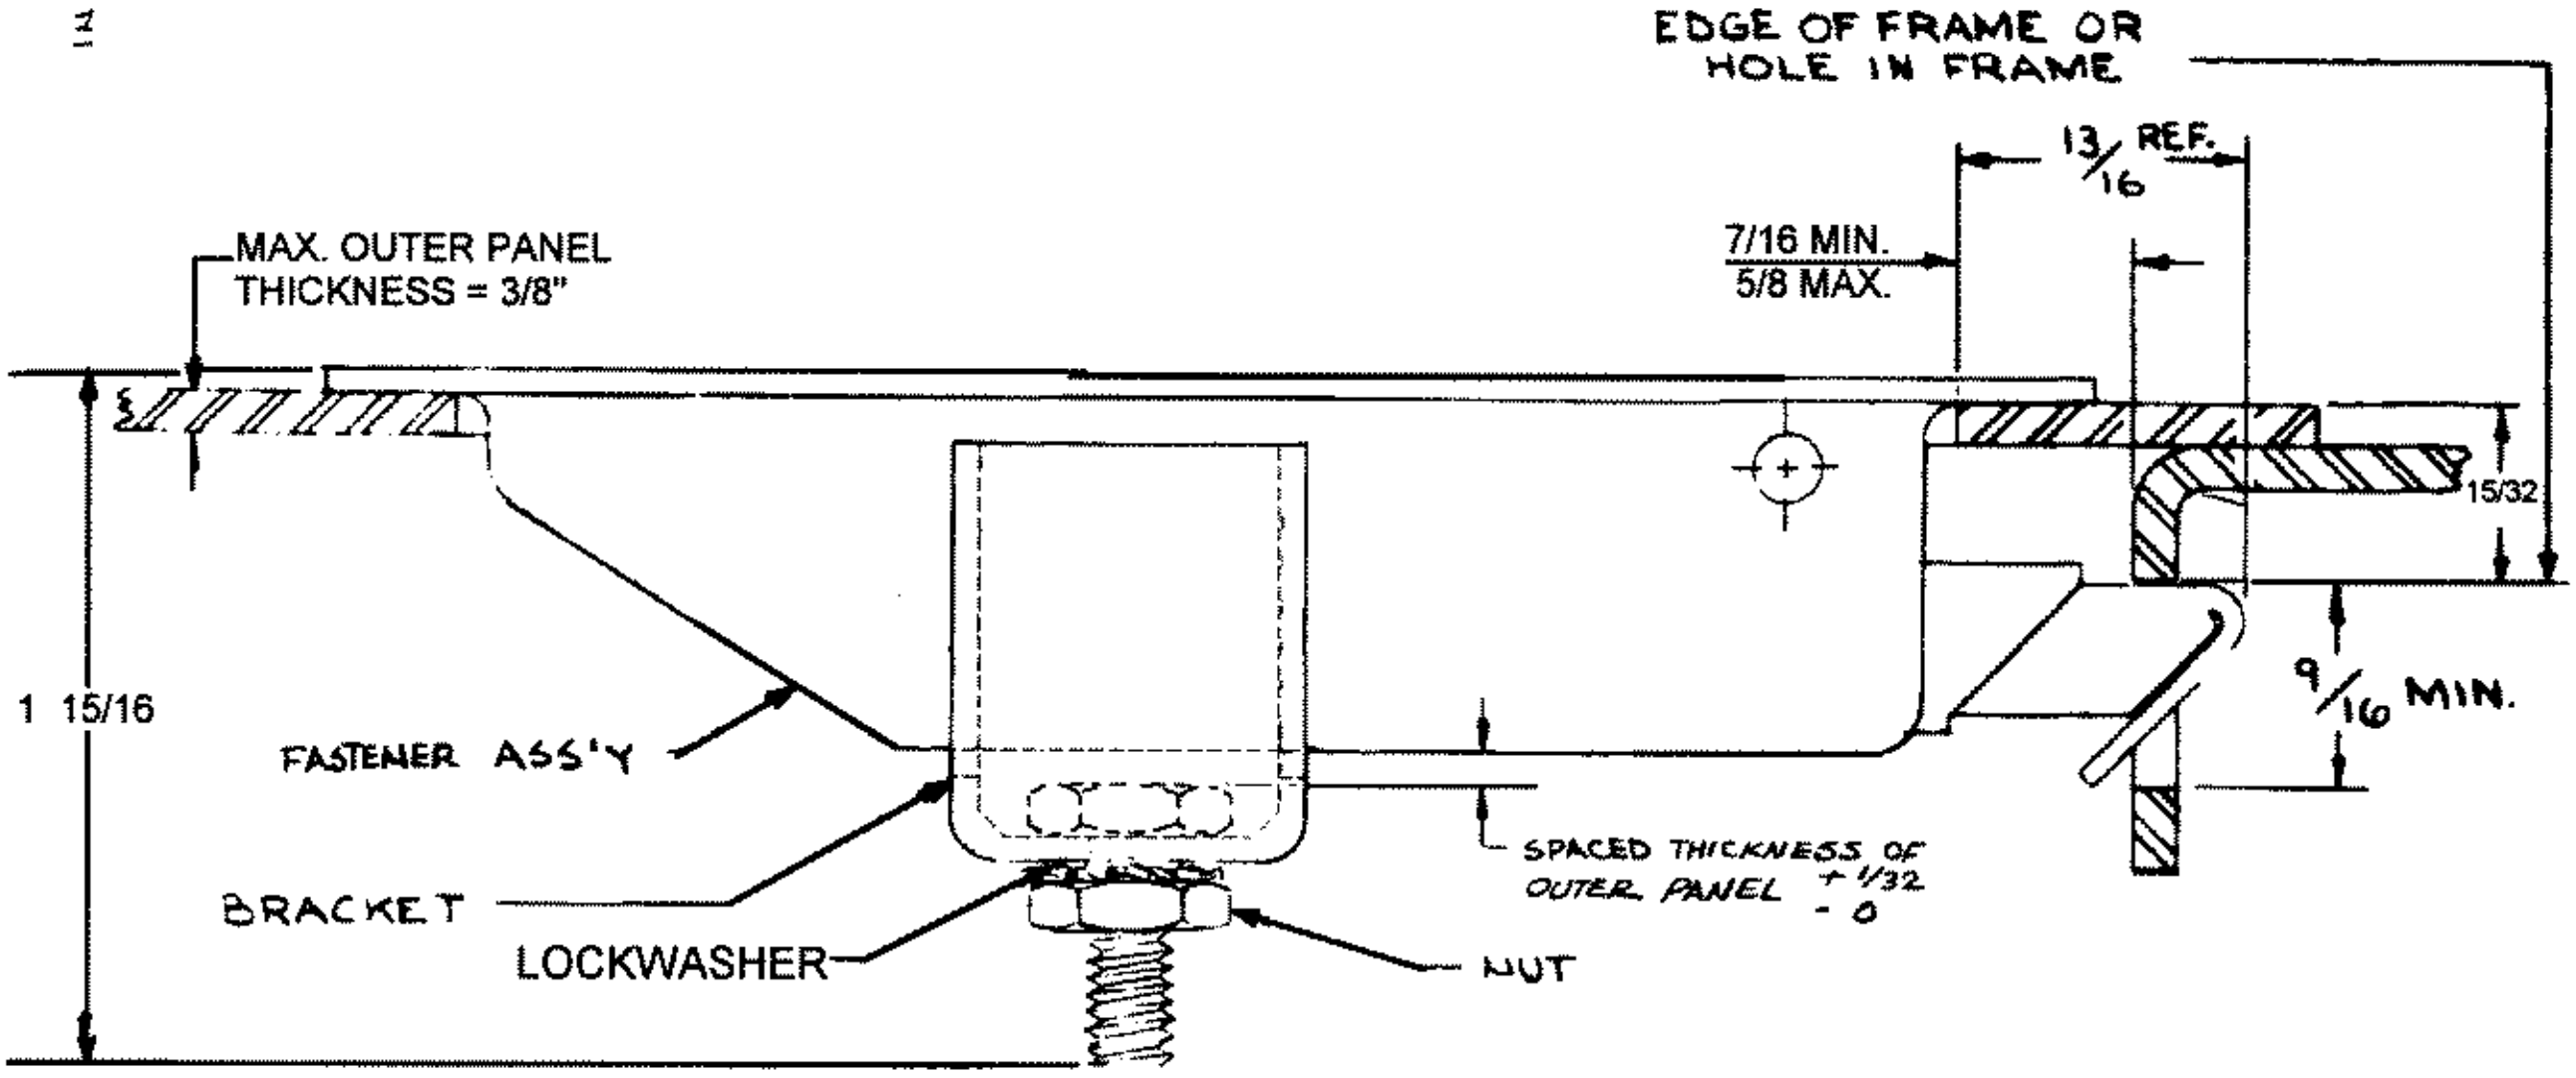

SOUTHCO No. 64 FLUSH PADDLE LATCH

DATE	DRAWN	CHKD	SCALE	DRAWING NUMBER
7-16-84	VBS		N.T.S.	J-64-10-301-90

R.S.	DATE	APP
A		
B		
C		
D		

DRAWING NUMBER J-64-10-301-90

REV'N A 2-24-88 RJB PRN 64-104

PROPRIETARY ITEM—EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.

SOUTHCO